

Body Worn Camera DOCK STATION

Model CCBWDS20 User Manual

1. Client-side operation software “Station”

Run “Station” as administrator to operate the Client-side software.

1.1 Device Registration

Run “Station” application (see below Figure 1).

Note: If there is no such interface appearing, please check whether there is “posset.dat” file in file “Station” in C-disk. If do, please delete it!

- Insert 1pc BWC into the first interface at the top left of the data acquisition station (see the left picture shown in Figure 2), when it shown “position is ok”, It means that this interface’s number is 0.

While insert BWC into this NO 0 interface to download data, end user could evaluate whether the transmitting of the BWC data in NO 0 interface is finished or not.

- Pull out the BWC and insert it into the second interface of the data acquisition station which is with red border (refer to the right side picture of Figure 2), Red border means that the interface has not been positioned. With the same method as the first one to position the following 7pcs interfaces until all interfaces have been positioned. Then click the bottom button “Apply”, it will show result in Figure 2.

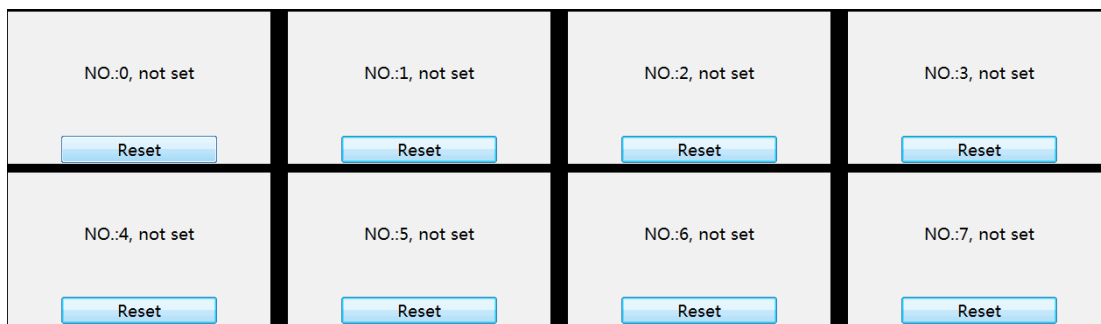


Figure 1

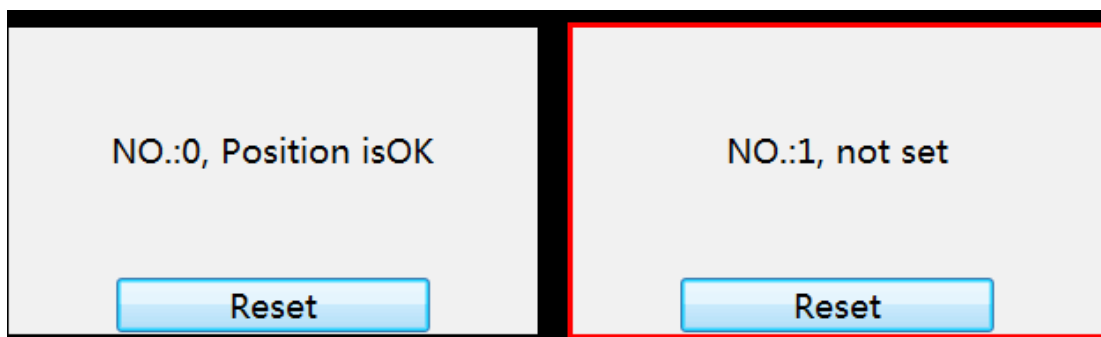


Figure 2

1.2 Device Registration


When camera position finished, the user first inserts the camera to docking station at the first time, the system will prompt to register.

If there is no personnel in the system, please click the management button to log in to the background.

management system and add the organization and personnel (refer to 2.2.1) in the trace of system management-user

management. While the addition is completed, enter the user number in the registration interface of the acquisition

interface and click the query to register.

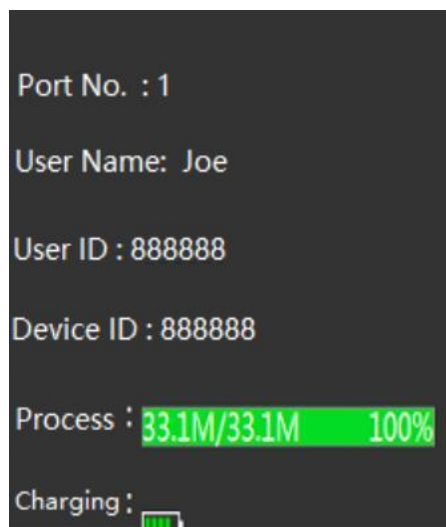

A screenshot of a registration form. It contains input fields for User ID (888888), User Name (Joe), and Device No. (888888), with a search button. Below are register and cancel buttons. At the bottom is a numeric keypad with a TAB button, a 0 button, a delete button (X), and buttons for digits 1-9.



1.2 Data Import

While camera has been registered and connected to docking station, data in camera will be exported to docking station

automatically and deleted directly. Meanwhile camera will charge automatically. Refer to following figure.


1.3 Set

Operating `Station` and click `Set`. input password 123456 while working as admin, user can change some information as following.

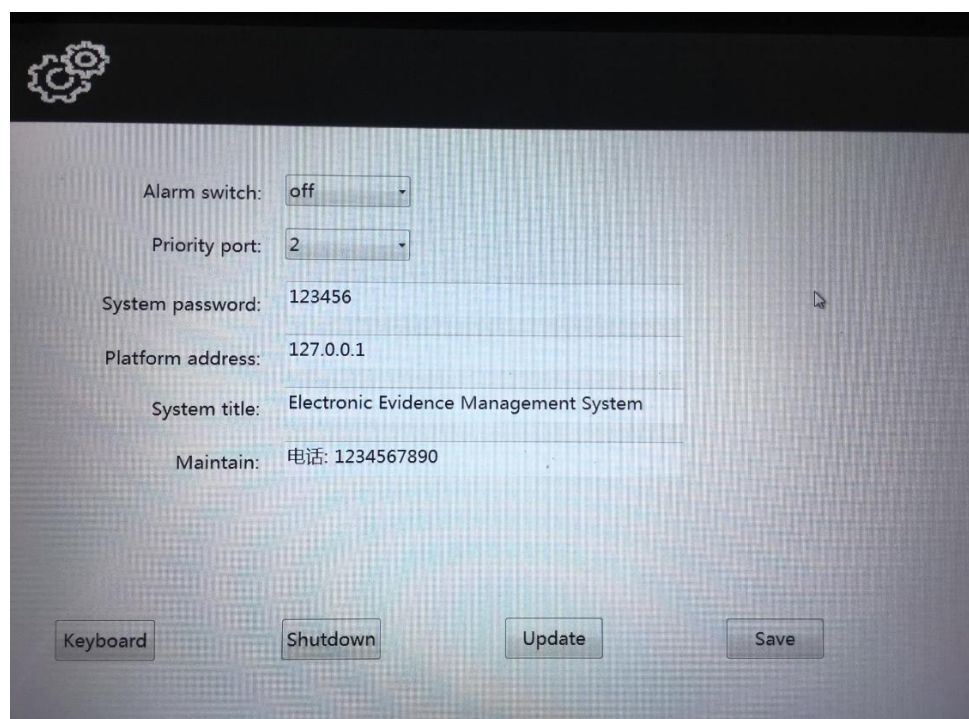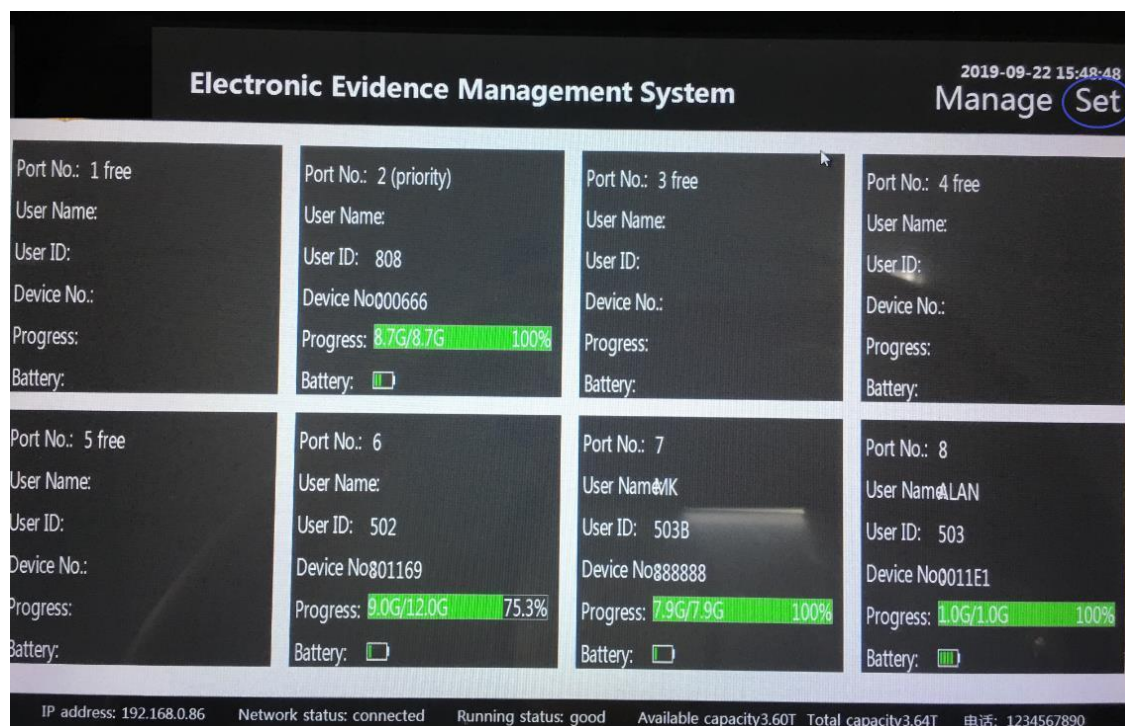

1.4 Manage setting

Choose Manage in client-side software to enter into data management platform. Default administrator account is admin and password is tt@admin. Account admin is used to maintain the basic information and configuration.

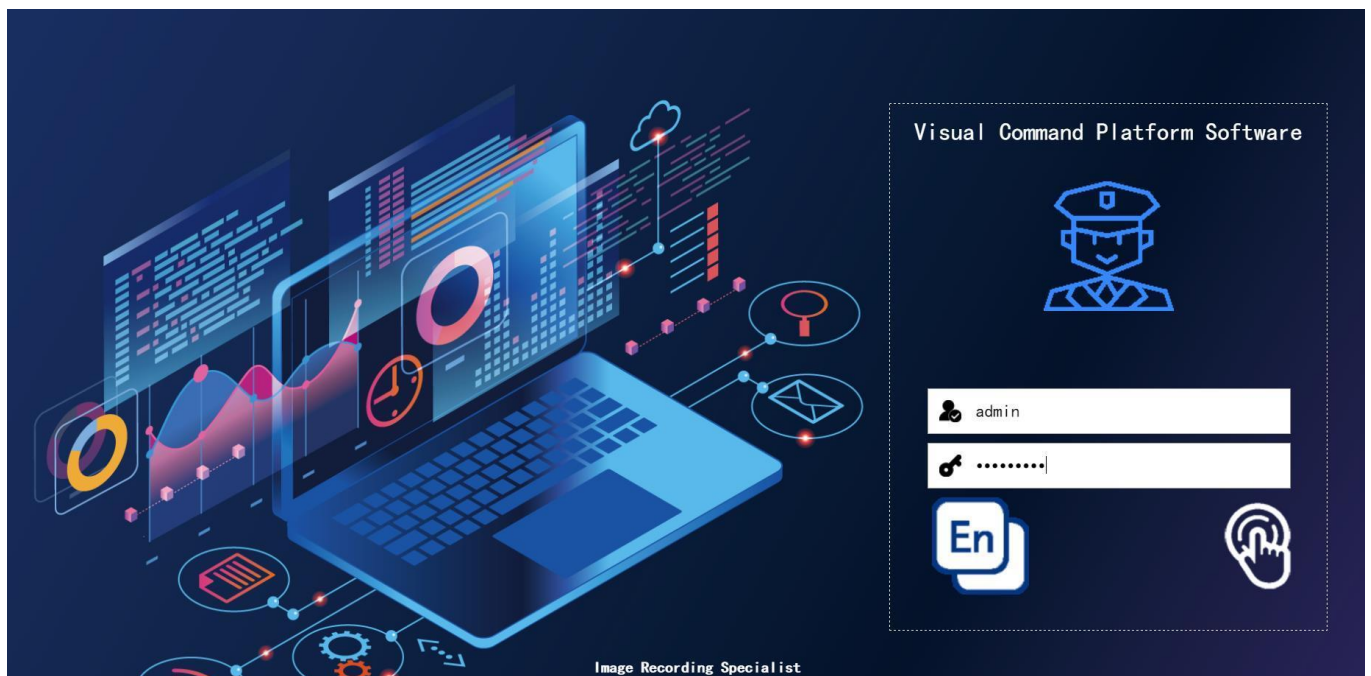

2 Data Management Platform Software

2.1 Administrator login



Login platform with account of `admin` to manage the devices.

2.2 System management

2.2.1 User Management

Choose `user` in `system`, choose the highest level and press `create` to create a new unit and create new department in

the same way. Input the department and unit in the popup windows. Create the user in the right side `user` management. Input the details as office number (user ID), device ID, user name, group (shown in the left) etc.

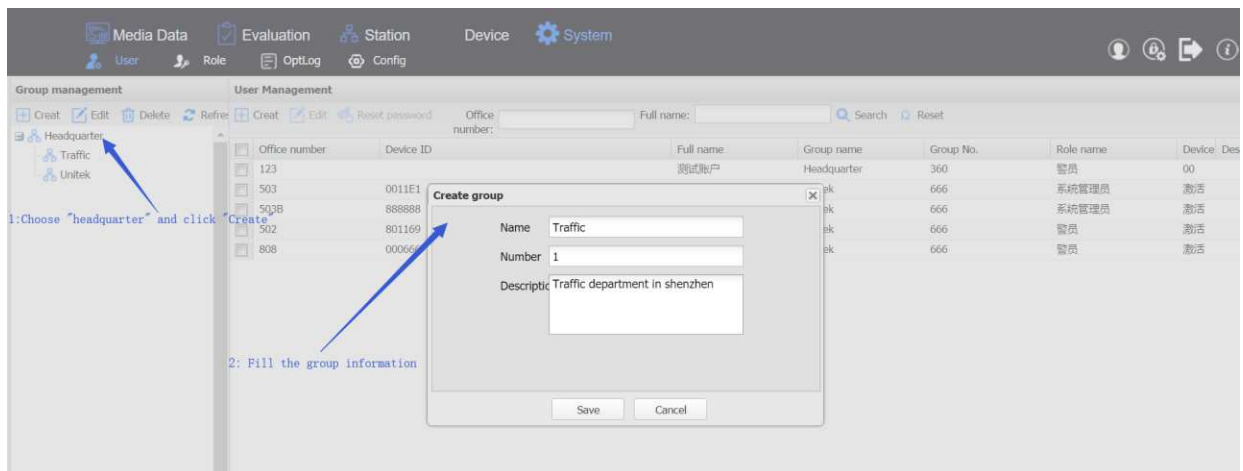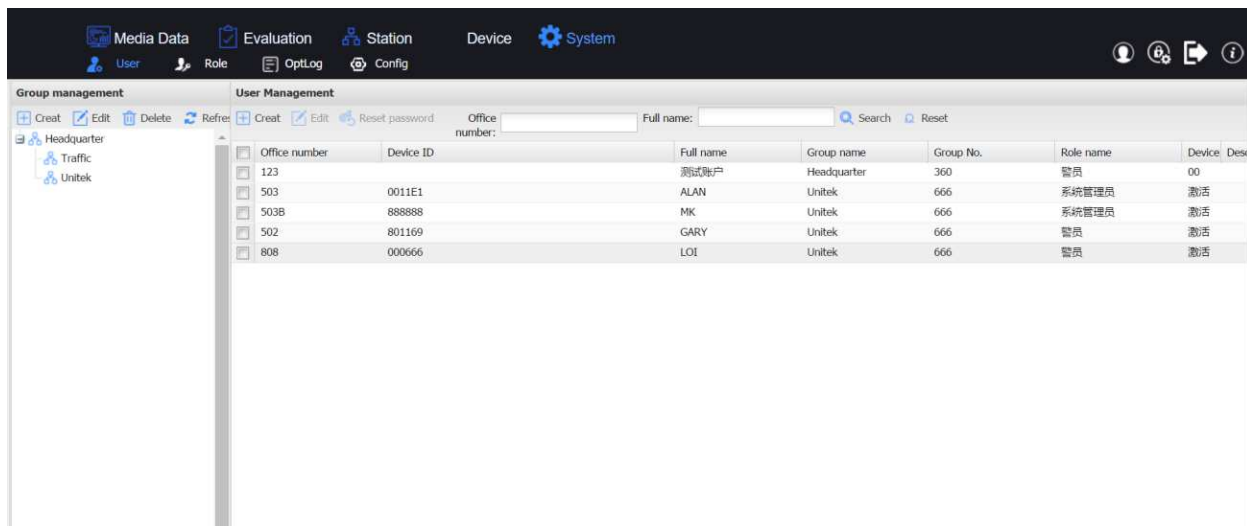

User Management

Office number	Device ID
No record!	

Creat user
✕

Office number:
Device ID:
Full name:
Group: ▾
Role: ▾
Device status: ▾
Phone number:
Sex: ☒ Male ☐ Female
Description:

2.2.2 Role Management

Click **Role** and press **create** to create a new role and authorize the right of each role while click the rights shown in the frame.

Role Management

Role name	Authority
administrator	Media Data, Media Data, Task Type
officer	Media Data, Task Type, Evaluation

Edite role
✕

Role name:
Authorized:

- ☒ Media Data
 - ☒ Media Data
 - ☒ Task Type
 - ☒ PhotoPush
- ☒ Evaluation
 - ☒ 警员考核
 - ☒ Group
 - ☒ 执法类型考核
- ☒ Stastics Analyse
 - ☒ Device
 - ☒ Type
 - ☒ 拍摄时间统计
- ☒ Station
 - ☒ Station Log
- ☒ Device

2.2.3 Operation log

Click operation log to check the operations.

Operation log

Delete

Clear

System menu: Please select

Office number:

Full name:

From: to:

Search

Reset

	System menu	Operation	Description	Operation user	Full name	IP	Operation time
<input type="checkbox"/>	User	Create	Officer ID606	admin	系统超级管理员	192.168.0.59	2019-09-22 17:39:28
<input type="checkbox"/>	Role	Edit	Name:administrator	admin	系统超级管理员	192.168.0.59	2019-09-22 17:37:12
<input type="checkbox"/>	Role	Edit	Name:officer	admin	系统超级管理员	192.168.0.59	2019-09-22 17:36:59
<input type="checkbox"/>	System Setting	Save	Modify	admin	系统超级管理员	192.168.0.59	2019-09-22 17:30:43
<input type="checkbox"/>	System	Login	admin	admin	系统超级管理员	192.168.0.59	2019-09-22 17:18:32
<input type="checkbox"/>	System operation	Import	Import file: 502@20190922153750@201...	502	GARY	127.0.0.1	2019-09-22 15:52:25
<input type="checkbox"/>	System operation	Import	Import file: 502@20190922153750@201...	502	GARY	127.0.0.1	2019-09-22 15:52:25
<input type="checkbox"/>	System operation	Import	Import file: 502@20190922153750@201...	502	GARY	127.0.0.1	2019-09-22 15:52:24
<input type="checkbox"/>	System operation	Import	Import file: 502@20190922153750@201...	502	GARY	127.0.0.1	2019-09-22 15:52:14
<input type="checkbox"/>	System operation	Import	Import file: 502@20190922153750@201...	502	GARY	127.0.0.1	2019-09-22 15:51:49
<input type="checkbox"/>	System operation	Import	Import file: 502@20190922153750@201...	502	GARY	127.0.0.1	2019-09-22 15:51:03
<input type="checkbox"/>	System operation	Import	Import file: 502@20190922153750@201...	502	GARY	127.0.0.1	2019-09-22 15:50:15
<input type="checkbox"/>	System operation	Import	Import file: 502@20190922153750@201...	502	GARY	127.0.0.1	2019-09-22 15:49:29
<input type="checkbox"/>	System operation	Import	Import file: 502@20190922153750@201...	502	GARY	127.0.0.1	2019-09-22 15:48:31
<input type="checkbox"/>	System operation	Import	Import file: 502@20190922153750@201...	502	GARY	127.0.0.1	2019-09-22 15:47:15

2.2.4 System setting

Press configuration and set the system.

System settings

Refresh

Save

System name

System name: Data Management Platform Software

Data Management Terminal: Data Management Terminal

Data cleaning

Clear Cycle(Day): 0

Immediately clear: Immediately clear

Disk space: D:1.1%

System backup

Auto backup cycle: One week

Last backup time:

System restore: Restore

Manual backup: Manual backup

Manual restore: Select a backup file

Delete log

Operation log: One Three Half year One year Not delete

2.3 Data Management (Media Data)

2.3.1 Data Management (Media Data)

Press 'Media Data' and choose the user to check the upload data such as audio, video and photo etc. User could search

the defined user and clarify and mark the data.

Office number:

Search

Reset

Edit

Delete

Play

Download

Batch type

Batch level

<input type="checkbox"/>	Office number	Full name	Group name	Type	File name	Device ID	File byname	Import time	Recording time	AUTO tag	Task type	Video duration
<input type="checkbox"/>	502	GARY	Unitek	Audio	20150101-000443-0...	801169	502@201909221537...	2019-09-22 15:37:50	2019-09-22 15:52:25	Normal	on and off sign	-
<input type="checkbox"/>	502	GARY	Unitek	Photo	20150101-024155-0...	801169	502@201909221537...	2019-09-22 15:37:50	2019-09-22 15:52:24	Normal	on and off sign	-
<input type="checkbox"/>	502	GARY	Unitek	Video	20150101-023950-0...	801169	502@201909221537...	2019-09-22 15:37:50	2019-09-22 15:52:14	Normal	on and off sign	2Minutes
<input type="checkbox"/>	502	GARY	Unitek	Video	20150101-022448-0...	801169	502@201909221537...	2019-09-22 15:37:50	2019-09-22 15:51:49	Normal	on and off sign	4Minutes
<input type="checkbox"/>	502	GARY	Unitek	Video	20150101-021447-0...	801169	502@201909221537...	2019-09-22 15:37:50	2019-09-22 15:51:03	Normal	on and off sign	10Minutes
<input type="checkbox"/>	502	GARY	Unitek	Video	20150101-020447-0...	801169	502@201909221537...	2019-09-22 15:37:50	2019-09-22 15:50:15	Normal	on and off sign	10Minutes
<input type="checkbox"/>	502	GARY	Unitek	Video	20150101-015448-0...	801169	502@201909221537...	2019-09-22 15:37:50	2019-09-22 15:49:29	Normal	on and off sign	10Minutes
<input type="checkbox"/>	502	GARY	Unitek	Video	20150101-014448-0...	801169	502@201909221537...	2019-09-22 15:37:50	2019-09-22 15:48:31	Normal	on and off sign	10Minutes
<input type="checkbox"/>	502	GARY	Unitek	Video	20150101-013448-0...	801169	502@201909221537...	2019-09-22 15:37:50	2019-09-22 15:47:16	Normal	on and off sign	10Minutes
<input type="checkbox"/>	502	GARY	Unitek	Video	20150101-012448-0...	801169	502@201909221537...	2019-09-22 15:37:50	2019-09-22 15:46:00	Normal	on and off sign	10Minutes

2.3.2 Task Type management

Task type		
<input type="button" value="Creat"/>	<input type="button" value="Edit"/>	<input type="button" value="Delete"/>
Name:	Search	Reset
Name	Description	Created time
<input type="checkbox"/> on and off sign	on and off sign	2014-07-06 14:31:35
<input type="checkbox"/> traffic	traffic record	2014-07-06 14:31:10

2.4 Evaluation

2.4.1 Officer Evaluation

Evaluate the related user in the group, such as file quantity, video length etc, and could be export with excel sheet.

Officer Evaluation

Group:

Unitek

Included: ☒


Office number:


Full name:


Recorded from:

to:

阈值:

 Search

 Reset

 Export

Group name	Office number	Full name	Video duration	Status	Quantity	Video	Photo	Audio
Unitek	808	LOI	5Hour23Minute24Seco...	-	47	37	7	3
Unitek	502	GARY	2Hour31Minute57Seco...	-	33	31	1	1
Unitek	503B	MK	2Hour27Minute30Seco...	-	25	21	2	2
Unitek	503	ALAN	29Minute42Second	-	20	14	3	3

2.4.2 Group evaluation

Evaluate the whole unit or department. Evaluation content could be exported in excel sheet.

Group						
Recorded from: <input type="text"/> to: <input type="text"/> Search Reset Refresh Export						
Group name	Officer	Video duration	Quantity	Video	Photo	Audio
Headquarter	7	10Hour52Minute33Second	125	103	13	9
Unitek	4	10Hour52Minute33Second	125	103	13	9
Traffic	1	-	0	-	-	-

2.4.3 Task type

Evaluate the work type and which one is with largest quantity.

Taks type											
Office number: <input type="text"/>	Full name: <input type="text"/>	Group: <input type="text"/>	Recorded from: <input type="text"/> to: <input type="text"/>		Search Reset		Export				
Group name	Office number	Full name	交通疏导	违法查纠	服务群众	突发事件	接警出警	现场勘察	调查取证	traffic	on and off sign
Unitek	503	ALAN	0	0	0	0	0	0	0	0	0
Unitek	503B	MK	0	0	0	0	0	0	0	0	0
Unitek	502	GARY	0	0	0	0	0	0	0	0	10
Unitek	808	LOI	0	0	0	0	0	0	0	0	0

2.5 Device management

Choose device management to management each registered camera.

Sim Lim Square 02-81 Whatsapp +65 98534404